



Photometrics®


Cascade:650

653 x 492 imaging array
7.4 x 7.4- μ m pixels



The Photometrics® Cascade:650 digital imaging system from Roper Scientific® offers very high sensitivity through the use of *on-chip multiplication gain*. The CCD camera's 16-bit digitization at 10 MHz provides good dynamic range at video frame rates and higher, while the fine pitch of the detector's pixels, 7.4 x 7.4 microns, is ideally matched to the resolution of optical microscopes. The thermoelectrically cooled system represents an excellent solution for low-light-level applications such as single-molecule fluorescence (SMF), intracellular ion imaging, and biological fluid flow measurements.

Features	Benefits
On-chip multiplication gain	Very high sensitivity Low-noise, impact-ionization process
653 x 492 imaging array 7.4 x 7.4- μ m pixels	Resolves fine detail Ideally matched to optical microscope
10-MHz readout 5-MHz readout	Good for high-speed image visualization Perfect for high-precision photometry
16-bit digitization	Good dynamic range allows detection of both bright and dim signals in the same image
Frame-transfer CCD	100% duty cycle to collect continuous data No mechanical shutter required
Virtual-phase CCD	Offers higher sensitivity compared to typical front-illuminated CCD cameras
Thermoelectric cooling	Reduces background for high sensitivity
C-mount	Easily attaches to microscopes, standard lenses, or optical equipment
PCI interface	Works with Windows® (98SE and later) and Mac operating systems
Enhanced PVCAM® Circular buffers Device sequencing	Compatibility with numerous third-party software packages Provides real-time focus Enables precise integration with shutters, filter wheels, etc.

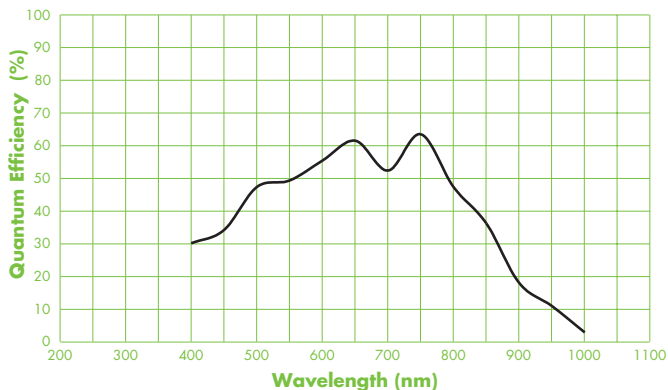


Note: Typical QE for a virtual-phase CCD is shown.

ROI size (pixels)	Frames per second
653 x 492	27
256 x 256	51
128 x 128	100
64 x 64	188
32 x 32	338
16 x 16	555

Note: Frame rates are measured at 10 MHz with 0-second exposure times.

Specifications

CCD image sensor	Texas Instruments TC253; frame-transfer CCD with on-chip multiplication gain
CCD format	653 x 492 imaging pixels; 7.4 x 7.4- μ m pixels; 4.9 x 3.7-mm imaging area (optically centered)
Linear full well single pixel	27,000 e ⁻
Readout bits/speed	16 bits @ 10 MHz and 5 MHz
On-chip multiplication gain	Software selectable; minimum achievable gain: 200x
Read noise	25 e ⁻ rms @ 10 MHz and 5 MHz (without on-chip multiplication gain)
Frame readout	36.2 ms/frame; 210 μ s (image-to-storage shift time)
CCD temperature	-25 to -35°C (regulated)
Dark current	1 e ⁻ /p/s @ -35°C
Binning	Full binning capabilities in parallel direction; no hardware binning in serial direction
Video output	RS170/PAL selectable
Operating environment	0 to 30°C ambient, 0 to 80% relative humidity noncondensing

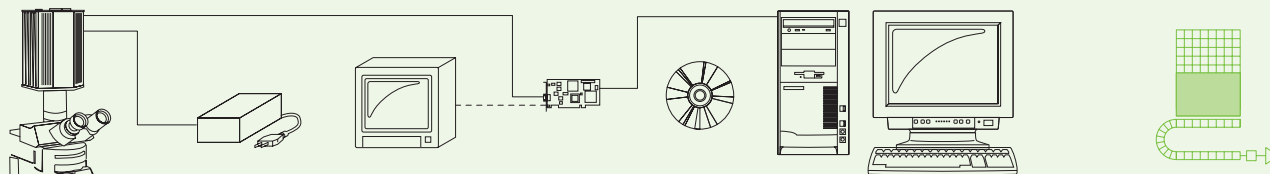

Note: Specifications are subject to change.

When you're **SERIOUS** about high-performance imaging...

www.roperscientific.com

USA East Coast 609.587.9797 **USA West Coast** 520.889.9933 **Benelux** +31.347.324989
France +33.160.86.03.65 **Germany** +49.89.660.779.3 **Japan** +81.43.274.8022

Cascade:650 Rev B1