



D A T A S H E E T

M

E

T

S

Y

S

X

I

T

N

A

U

Q

Quantix:1602E
 Photometrics
 1536 x 1024 imaging array
 9 x 9- μ m pixels

The Photometrics Quantix:1602E is a fast, high-resolution digital camera system designed for low-light scientific and industrial applications. This cooled CCD camera system provides 12-bit digitization at 5 MHz. The fine pitch of the pixels, 9 x 9 microns, is well matched to the resolution of optical microscopes. Megapixel resolution and small pixels allow imaging of very fine detail, yet the pixels can be easily binned to improve sensitivity. The CCD uses indium tin oxide (ITO) technology to raise quantum efficiency, particularly in the blue/green.

F E A T U R E S

B E N E F I T S



5-MHz digitization	Fast image readout for high-speed focus and image capture
1536 x 1024 imaging array 9 x 9- μ m pixels	Resolves fine detail with large field of view Well matched to optical microscope
Scientific-grade CCD	Few defects and hot pixels
Single-window imaging path	Minimizes reflections and distortion Higher QE performance
ITO transparent gates	Higher QE performance throughout visible spectrum
Three detection modes	Optimized for high sensitivity, high dynamic range, and high SNR
Flexible binning and readout	Increases light sensitivity while increasing the frame rate
12-bit digitization	Quantifies both bright and dim signals in the same image
Thermoelectric cooling	Long integration times for higher sensitivity
C-mount or F-mount with shutter	Selectable for the best optical path Easily attaches to standard lenses or optical equipment
PCI interface	Works with PC, Macintosh, Linux [®]
Detailed test report	Proven performance characteristics





D A T A S H E E T

M
E
T
R
O
L
O
G
Y
S
Y
S
T
E
M
S
Q

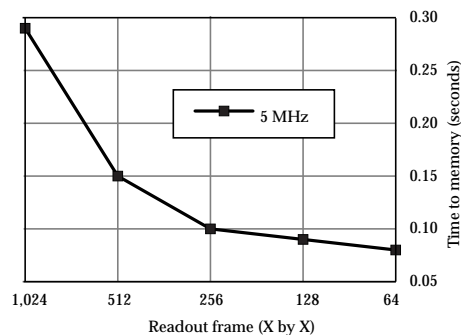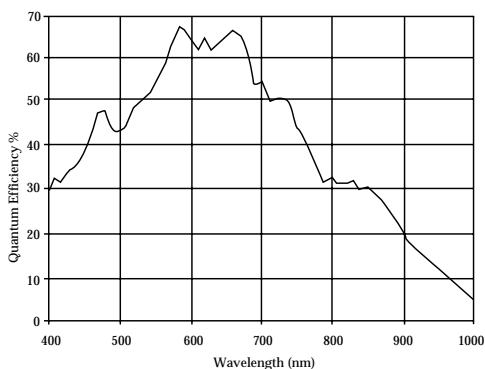

To calculate total frame read time, add exposure time and shutter open and close delays to "time to memory."

S P E C I F I C A T I O N S

CCD image sensor	Kodak KAF1602E; scientific grade; MPP; Metachrome® II UV enhancement (optional)
CCD format	1536 x 1024 imaging pixels plus 14/14 serial pre/postscan pixels; 4/4 parallel pre/postscan rows; 9 x 9-µm pixels; 100% fill factor; progressive scan; 13.8 x 9.2-mm imaging area (optically centered)
Grades	Grade 1: ≤5 point defects, 0 cluster defects, 0 column defects; Grade 2: ≤10 point defects, ≤4 cluster defects, ≤2 column defects; Grade 3: ≤20 point defects, ≤8 cluster defects, ≤4 column defects
User gains	Three detection modes or gains; software selectable; high sensitivity, high dynamic range, high SNR
Linear full well	167,000 e ⁻ @ 0.5x; 86,000 e ⁻ @ 1x; 20,000 e ⁻ @ 4x
Read noise (1/5 MHz)	High signal-to-noise ratio – 37/37 e ⁻ rms @ 0.5x; High dynamic range – 25/25 e ⁻ rms @ 1x; High sensitivity – 16/16 e ⁻ rms @ 4x
Nonlinearity	≤0.5%
Readout bits/speed	12 bits @ 5 MHz or 1 MHz; software selectable
Parallel shift rate	33 µsec/row
Serial discard rate	0.1 µsec/pixel
Frame readout	0.35 seconds for full frame at 5 MHz
Dark current	0.05 e ⁻ /p/s with forced-air cooling (-25°C); 0.02 e ⁻ /p/s with liquid cooling (-35°C)
Operating environment	0 to 30°C ambient, 5 to 70% relative humidity noncondensing (5 to 80% RH for F-mount)

Note: Specifications are typical and subject to change.



ROPER SCIENTIFIC®
PHOTOMETRICS

3440 East Britannia Drive, Tucson, AZ 85706 tel: 520.889.9933 fax: 520.573.1944
3660 Quakerbridge Road, Trenton, NJ 08619 tel: 609.587.9797 fax: 609.587.1970
email: info@roperscientific.com web: www.roperscientific.com

Quantix:1602E Rev B0